

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

C

B

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

4 3 2 1


DWG. NO.  
**SC52453**

PLATING TABLE	
CATALOG NUMBER	PLATE PER SOURIAU SPEC F450
LRM16W - 2F51	TYPE 51 GOLD OVER SILVER
LRM16W - 2F74	TYPE 74 - RHODIUM OVER SILVER
LRM16W - 2DB6	TYPE DB6-HARD GOLD OVER SOFT GOLD OVER COPPER
<b>LRM16W - 2DE5</b>	TYPE DE5 GOLD OVER COPPER
LRM16W - 2F63	TYPE F63 GOLD OVER SILVER
LRM16W - 2D29	TYPE D29-HARD GOLD OVER SILVER

NOTES:  
 COLOR CODE:  
 1 BLUE DENOTES #16 SIZE WIRE BARREL.  
 2 RED DENOTES #20 SIZE MATING END.  
 MATERIAL:  
 BRASS  
 FINISH:  
 SEE TABLE

D

C

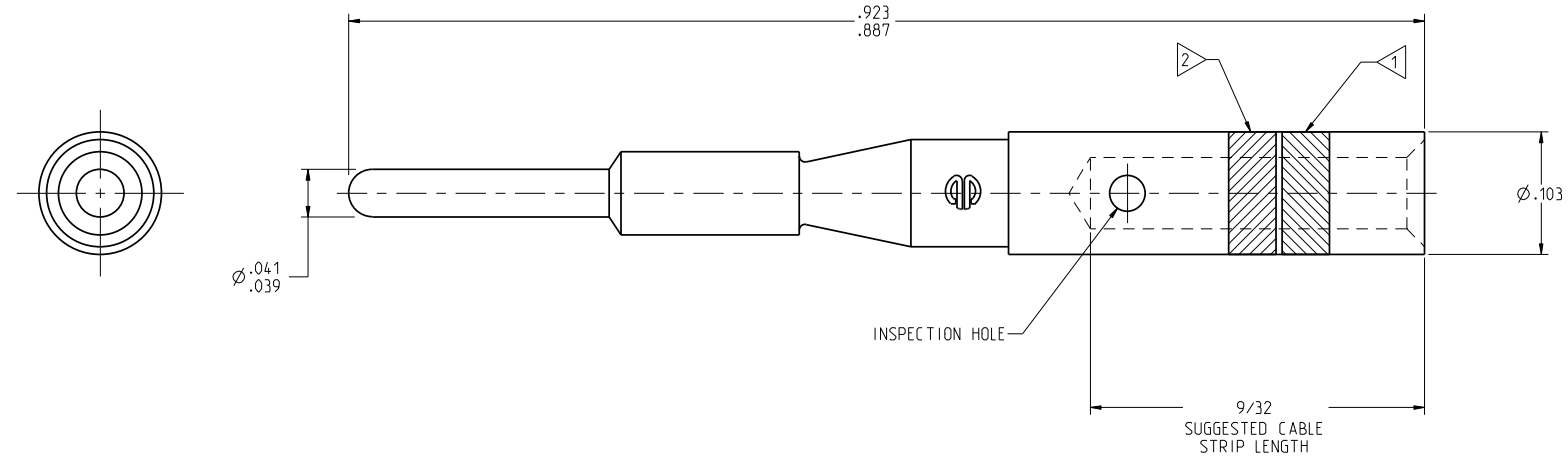

ACCOMMODATES	CRIMPING TOOL	EXTRACTION TOOL
#16, 18, 20 PER MIL-W-16878 TYPE E MIL-W-5086 MIL-W-27300	M10S TOOL S-7-1 DIE SET SL-44 POSITIONER	RX20-24

P	REVISED PER ECN10186	GRB	FLR
13	ADDED SPACE BETWEEN ADJACENT COLOR BAND (ECN 161)	01-18-07	01-18-07
12	LRM16W-2F72-F72 RHODIUM NICKEL OVER GOLD REMOVED FROM PLATING TABLE (ECB 2355)	10-08-81	10-08-81
11	LRM16W-2F72 ADDED (ECB2379)	LH	SFP
10	S-7-1 DIE SET WAS S-7 DIE SET (ECB 2355)	06-10-76	09-03-76
9	LRM16W-2D29 ADDED (ECB2246)	MRP	SFP
8	F63 PLATING ADDED (ECB 1987)	09-03-76	09-03-76
7	DES PLATING ADDED (ECB 1695)	MRT	DL
6	ADDED COLOR CODE (ECB1061)	04-07-76	04-07-76
5	ADDED TYPE DB4 TO PLATING TABLE (ECB1014)	HE	DL
4	ADDED TYPE F74 TO PLATING (EC338500)	08-07-75	08-07-75
3	USED IN SMOOTH BANTAM NOTE ADDED	HC	DE
2	MS3190, MS3192, REMOVED (EC28252)	06-27-73	006-27-73
1	TABLE ADDED (EC27717)	RWV	RWV
REV	ECN NUMBER	05-30-72	05-30-72
		PJB	RWV
		03-10-70	03-10-70
		JC	RVV
		16-11-69	16-11-69
		RLC	RLC
		09-29-66	09-29-66
		SM	AFR
		10-06-64	10-06-64
		TMM	TMM
		06-19-63	06-19-63
		TMM	WNT
		03-29-63	03-29-63
		BY	CHKD
		DATE	DATE

B

REFERENCE : FD52452

LINEAR MEASURE:	<input type="checkbox"/> INCH <input type="checkbox"/> INCH (mm)
THIRD ANGLE PROJECTION	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
No. OF PLACES	INCH (mm)
ONE PLACE	±.1 (±.3)
TWO PLACES	±.02 (±0.5)
THREE PLACES	±.010 (±0.25)
ANGLES	±1°

DRAWING TITLE  
**SMOOTH CONTACT HYFEN PIN**

CAT NO.  
**LRM16W-2 (SEE TABLE)**

CAGE NO: 09922    SIZE: C

**CUSTOMER**

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

www.souriau.com

DRAWN:	GRB	01-18-07
CHKD:	FLR	01-18-07
DSGN:	GRB	01-18-07
MFG:	RR	01-18-07
QC:	DK	01-18-07
DRAWING SCALE:	10:1	
DRAWING NO.	REV	
<b>SC52453</b>	<b>P</b>	
1 OF 1		

A

4

3

2

1

PRO-E