

Housing - HC-B 6-SML-74/O2M32 - 1646858

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON box mounting base B6, with single locking latch. Height 74 mm, with supports 2x M32



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	276.0 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Height	74 mm
Width	57 mm
Length	84 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B6, BB10, DD24, M Tall housings for extra large wiring space
Size	B6
Housing type	Box mounting bases
Locking type	With single locking latch
No. of cable outlets	2
Cable exit	Lateral
Screw connection	none

Housing - HC-B 6-SML-74/O2M32 - 1646858

Technical data

General

Type of the screw connection	2x M32
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	Stainless steel, handle: PA
Material grip body interlock	PA

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

Approvals

Approvals

Approvals

EAC

Housing - HC-B 6-SML-74/O2M32 - 1646858

Approvals

Ex Approvals


Approvals submitted

Approval details

EAC

Drawings

Dimensional drawing

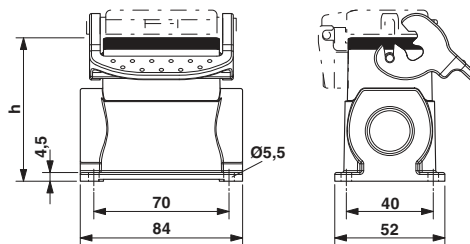

Dimensional drawing; $h = 74$ mm, $a = 45$ mm, $b = 57$ mm
