# 178327-5 - ACTIVE

#### Dynamic Series | Dynamic 3000 Series

TE Internal #: 178327-5 PCB Mount Header, Vertical, Wire-to-Board, 16 Position, 3.81 mm [. 15 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Dynamic 3000 Series

#### View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > Header Assembly: Wire-to-Board, 15A, gold or tin plated



Connector System: Wire-to-Board Number of Positions: 16 Number of Rows: 2

Centerline (Pitch): 3.81 mm [.15 in]

PCB Mount Orientation: Vertical

#### All Header Assembly: Wire-to-Board, 15A, gold or tin plated (120)



### Features

#### **Product Type Features**

Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Configuration Features	
Number of Positions	16
Number of Rows	2
PCB Mount Orientation	Vertical
Body Features	
Primary Product Color	Black
Contact Features	

PCB Mount Header, Vertical, Wire-to-Board, 16 Position, 3.81 mm [.15 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Dynamic 3000 Series



Contact Mating Area Plating Material Thickness	2 µm[80 µin]
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	8 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Retention Leg
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With
Housing Features	
Housing Material	Polyester GF
Centerline (Pitch)	3.81 mm[.15 in]
Jsage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
ndustry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Box, Tube
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235)

PCB Mount Header, Vertical, Wire-to-Board, 16 Position, 3.81 mm [.15 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Dynamic 3000 Series



Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




## Also in the Series | Dynamic 3000 Series

A Carton and a car			
Connector Contacts(3)	Insertion & Extraction Tools(1)	PCB Connector Keying(1)	PCB Connector Mounting(8)

PCB Mount Header, Vertical, Wire-to-Board, 16 Position, 3.81 mm [.15 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Dynamic 3000 Series





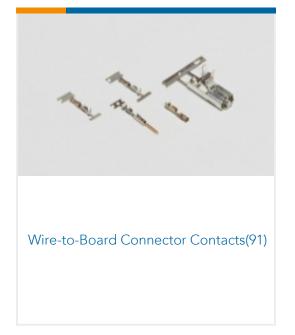


## Customers Also Bought



9		g			
Receptacl pitch, 250\	e and Tab Housing: 3.81 mm V	Header Assembly: Wire-to-Board, 15A, gold or tin plated	DYNAMIC D-3 REC CONT. M PRE-TI L/P	N	IDC LOW PRO HDR 14P VERT LG L
TE Part #1		TE Part #1-178317-2	TE Part #1-175217-5		TE Part #1761606-5



## Documents

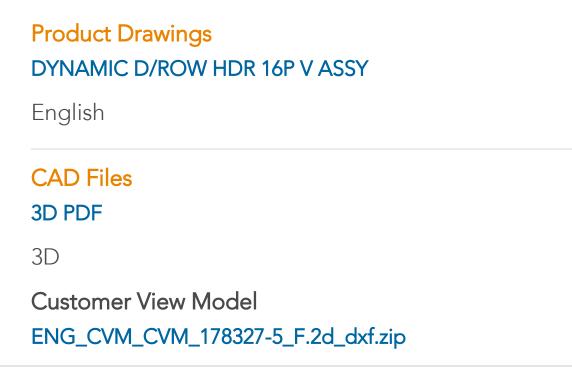

LA

PCB Mount Header, Vertical, Wire-to-Board, 16 Position, 3.81 mm [.15 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Dynamic 3000 Series



English

Customer View Model ENG\_CVM\_CVM\_178327-5\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_178327-5\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the  $\ensuremath{\mathsf{Terms}}\xspace$  and  $\ensuremath{\mathsf{Conditions}}\xspace$  of use.

Datasheets & Catalog Pages 1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

Japanese

1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance MD\_178327-5\_09172011929

English

MD\_178327-5\_09172011929

English

Agency Approvals TUV Certificate

English