
776230-4 - ACTIVE

AMP | AMPSEAL

TE Internal #: 776230-4 PCB Mount Header, Vertical, Wire-to-Board, 35 Position, 4 mm [. 157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > AMPSEAL PCB Headers

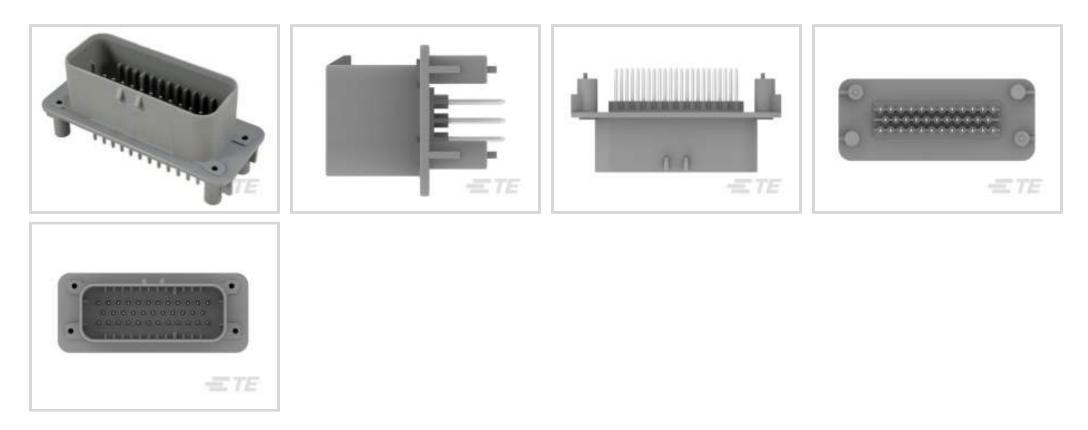

Connector System: Wire-to-Board

Number of Positions: 35

Centerline (Pitch): 4 mm [.157 in]

Sealable: Yes

PCB Mount Orientation: Vertical

All AMPSEAL PCB Headers (58)

Connectivity

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	35
PCB Mount Orientation	Vertical
Number of Rows	3
Body Features	
Primary Product Color	Gray
Contact Features	

S For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



Contact Type Contact Mating Area Plating Material Contact Current Rating (Max)	Pin Tin	
Contact Current Rating (Max)		
	8 A	
Termination Features		
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mating Alignment	With	
PCB Mount Alignment	With	
PCB Mount Retention	Without	
Connector Mounting Type	Fixing Screw	
Housing Features		
Centerline (Pitch)	4 mm[.157 in]	
Usage Conditions		
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		

UL 94V-0

Packaging Features

Packaging Type	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Wave solder capable to 265°C	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | AMPSEAL

Automotive Connector Caps & Covers (5)	Automotive Connector Locks & Position Assurance(1)	Automotive Housings(31)	Automotive Seals & Cavity Plugs(1)



Customers Also Bought

PCB Mount Header, Vertical, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL





Documents

Product Drawings 35POS, PIN DIA 1.3, HDR ASSY, 180DEG, COD 4

English

CAD Files

3D PDF

English

Customer View Model ENG_CVM_776230-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_776230-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_776230-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages AMPSEAL Connector Catalog

English

ICT Terminals and Connectors Catalogue

English

Product Specifications

Application Specification

English

PCB Mount Header, Vertical, Wire-to-Board, 35 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Sealable, AMPSEAL



Agency Approvals UL Report

English