


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SSM-21T-P1.4	Connector Male Contact
2	UL1007, 22 AWG	Black

Electrical Specifications
Current: 7.0A AC/DC
Voltage: 300V AC/DC

APPLICABLE HOUSINGS			
HL SERIES		SL SERIES	
NO. OF CIRCUITS	HOUSING PART NO.	NO. OF CIRCUITS	HOUSING PART NO.
2	HLR-02V	1	SLR-01VF
	HLR-02VF	2	SLR-02VF
3	HLR-03V	3	SLR-03VF
	HLR-04V		SLR-03VF-MD
4	HLR-04VF	4	SLR-04VF
	HLR-08V	6	SLR-06VF
8	HLR-08V		
9	HLR-09VF	-	-
12	HLR-12V	-	-

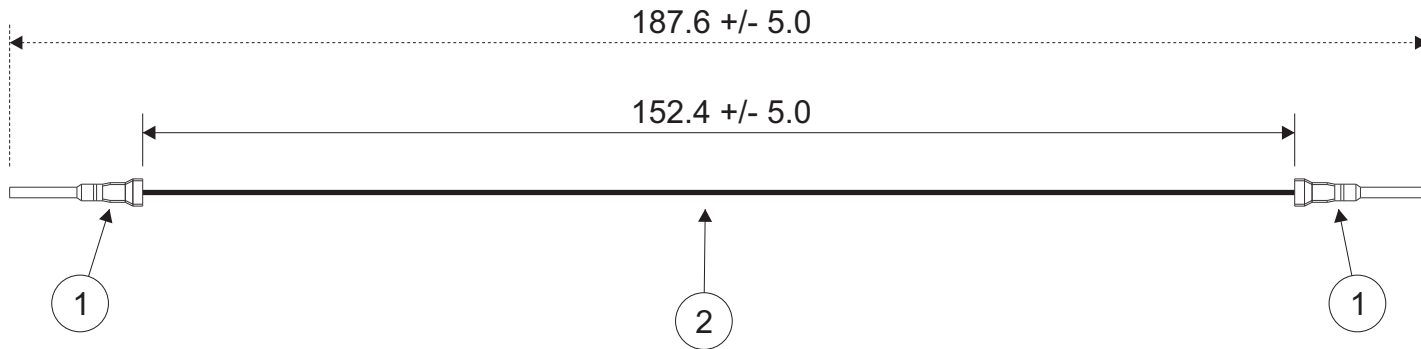

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.	CUSTOMER NAME		
	DESCRIPTION 3.96mm Pitch HL & SL Series Standard Leads - 6" Inside Length DOUBLE END LEADS, M-M		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE	DRAWING NO. GAM-557	REV
	1:1	ASSMSSM22K152	DATE 12/13/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Added SL Series	1/21/2019	LM