LOADING PATTERN MATING SIDE

f	0	0	0	0	0	0	0	0	0	0	0	X	X	X	0	0	0	0	0	0	0	0	0	0	0
e	0	5	0	0	5	0	0	5	0	0	5	0	0	0	0	5	0	0	5	0	0	5	0	0	5
d	5	0	0	5	0	0	5	0	0	5	0	0	5	0	5	0	0	5	0	0	5	0	0	5	0
c	0	0	0	0	0	0	0	0	0	0	0	0	5	0	0	0	0	0	0	0	0	0	0	0	0
b	0	5	0	0	5	0	0	5	0	0	5	0	5	0	0	5	0	0	5	0	0	5	0	0	5
a	5	0	0	5	0	0	5	0	0	5	0	0	0	0	5	0	0	5	0	0	5	0	0	5	0
z	0	0	0	0	0	0	0	0	0	0	0	X	X	X	0	0	0	0	0	0	0	0	0	0	0
POS	01				05					10					15					20					25

LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

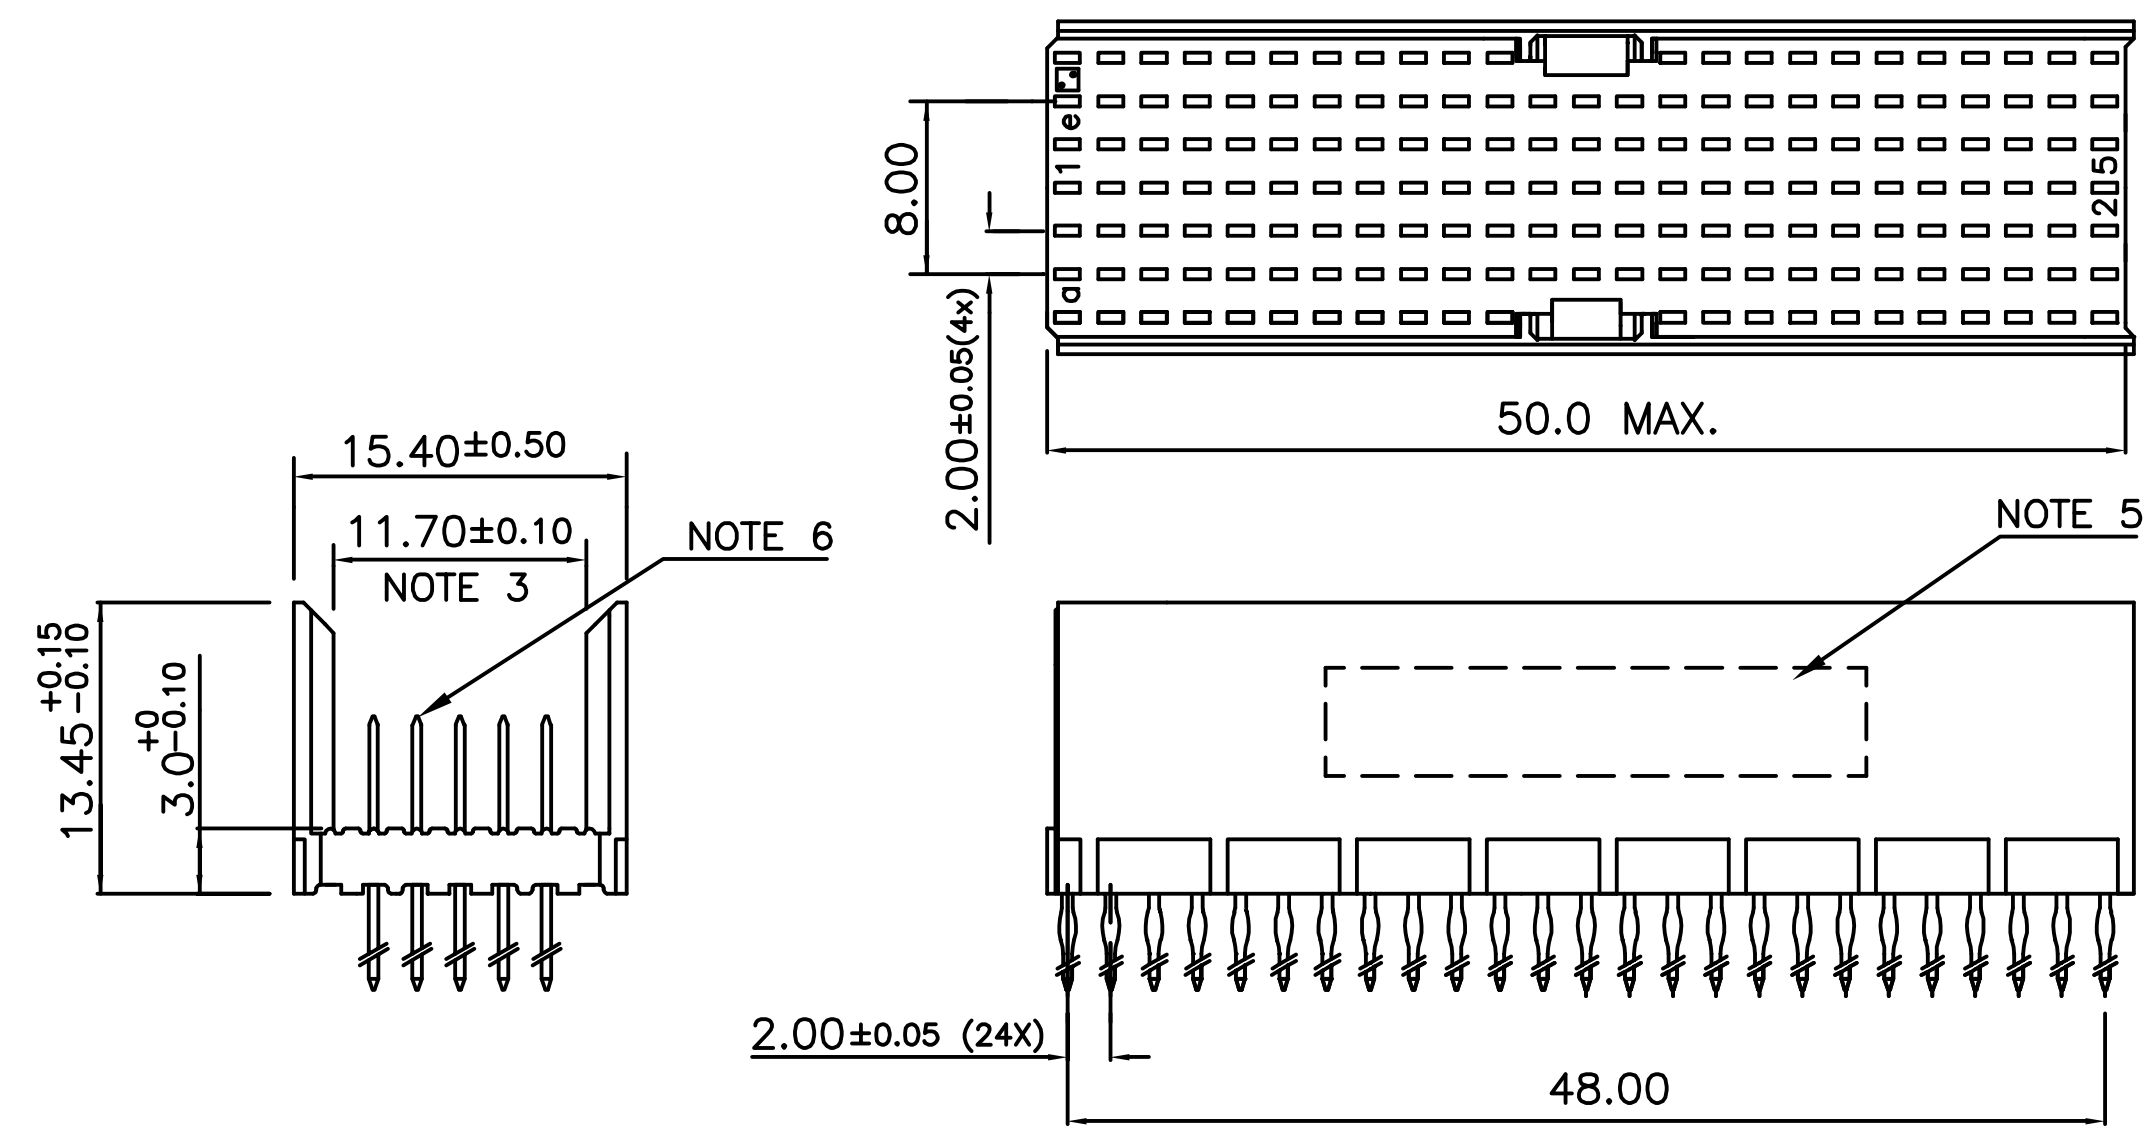

CONTACT OVERVIEW

5

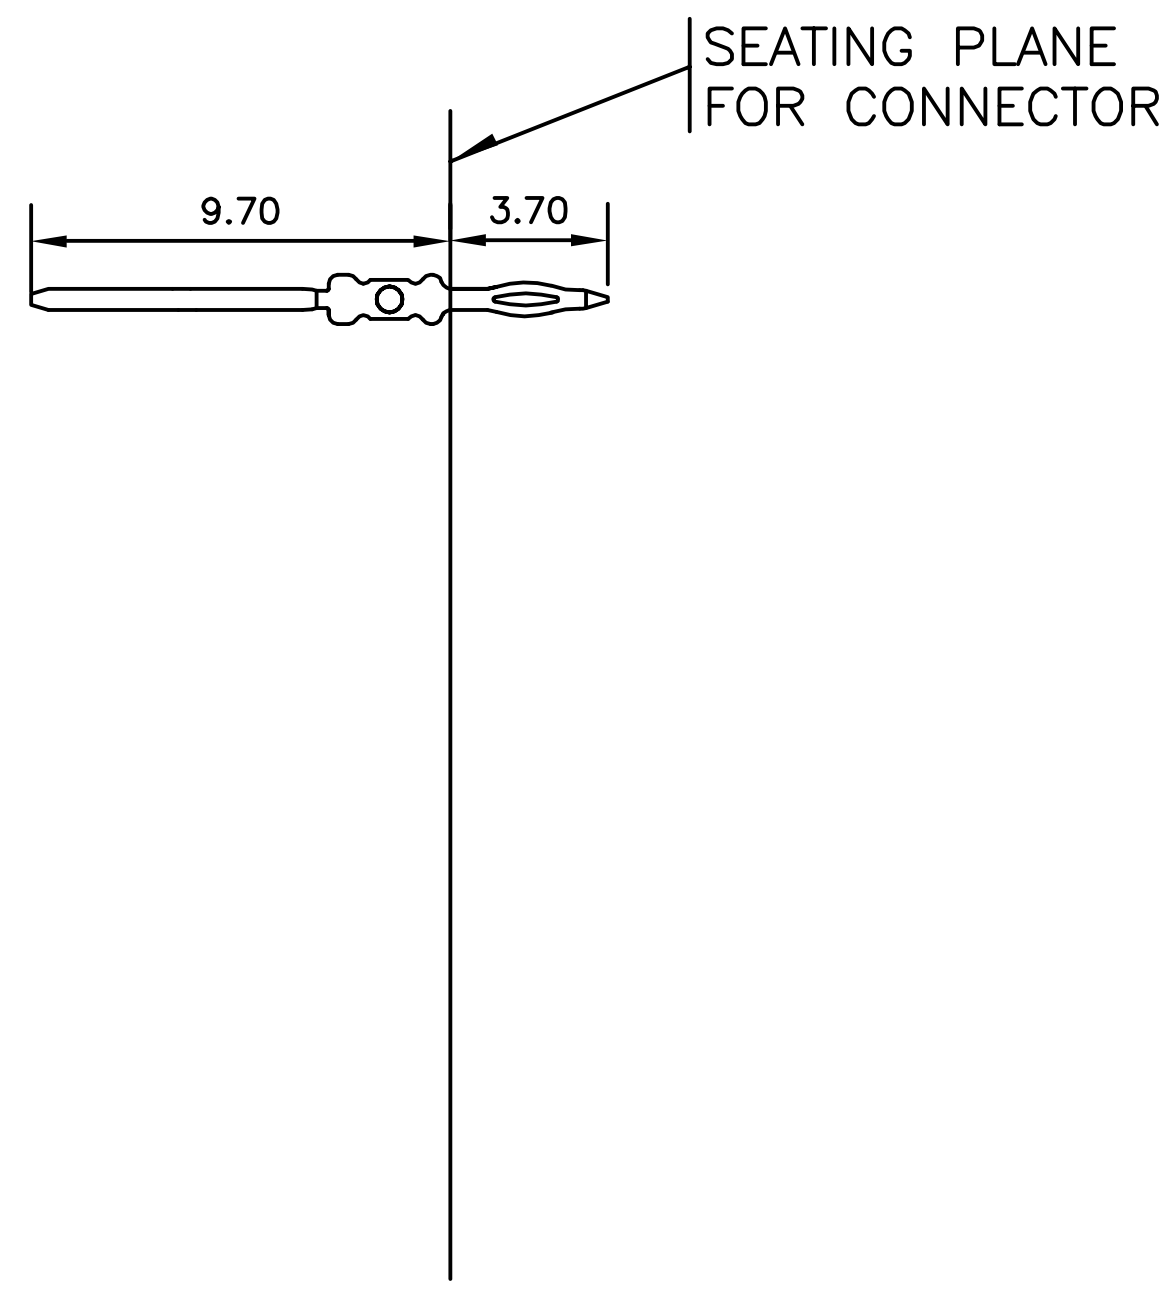

LAY–OUT P.C.B.–HOLE

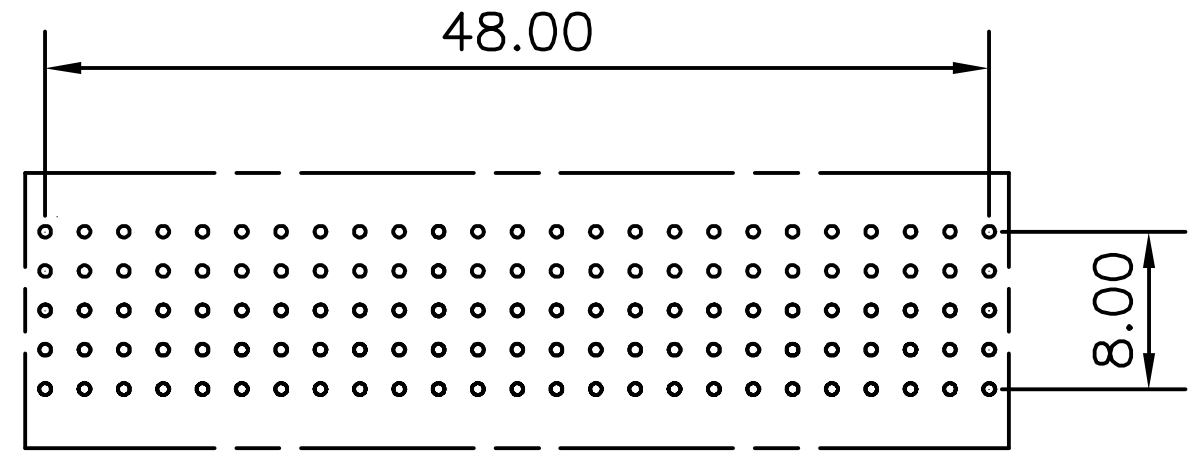

HM2P65PDJ3X0----

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. MATERIAL CONTACT: PHOSPHORBRONZE
   HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
8. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

CATALOG NO: HM2P65PDJ3X0- - - -

ltr	ecn no	dr	date
A	I07-0043	MINI	2007-03-23

mat'l. code: SEE NOTE 4

surface: ISO 1302 √ | tolerance: ISO 406 ISO 1101 | projection

tolerances unless otherwise specified: angles 0°±1°; linear .0±0.2, .00±0.1

MM | scale –

dr	MINI K VANDANATH	2007-03-23
engr	BIJU K PAUL	2007-03-23
chr	BIJU K PAUL	2007-03-23
appd	BIJU K PAUL	2007-03-23

product family: MILLIPACS

title: MPACS 5+2R STR HDR PF CONN TYPE AB

dwg no: BS, C ,203028, 761 | sheet 1 of 1 | size A3

type: Product Customer Drawing

sheet index | revision A | sheet 1

FCIconnect.com
Copyright FCI

form: A3

PDM: Rev:A STATUS:Released Printed: Dec 04, 2007