



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A2		ECR-19-006203	23APR2019	RZ	RS

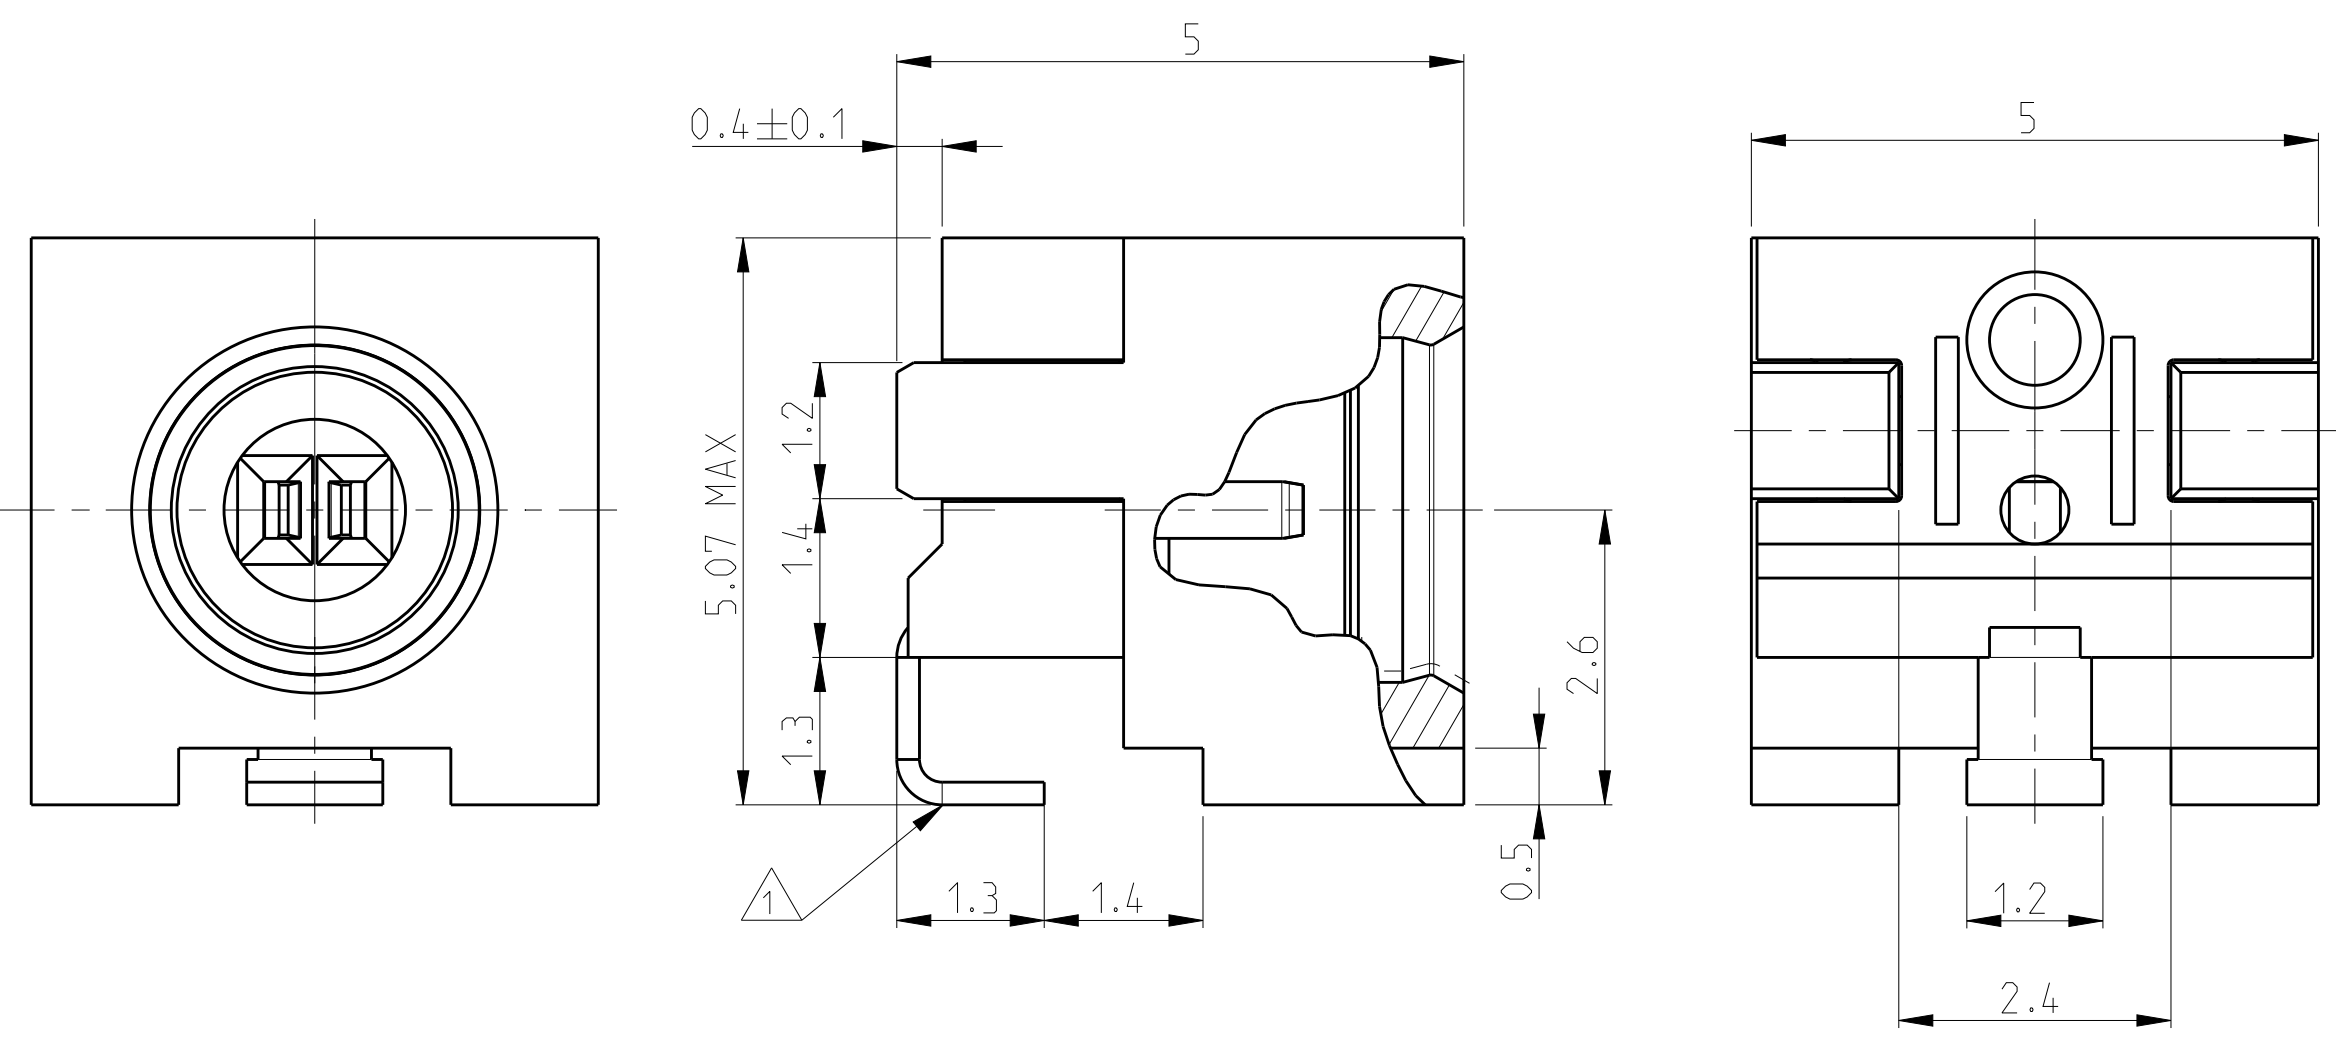

Packaging : Tape on reel

Reel width : 22.4 mm
Reel diameter : 330 mm
Quantity per reel : 1500

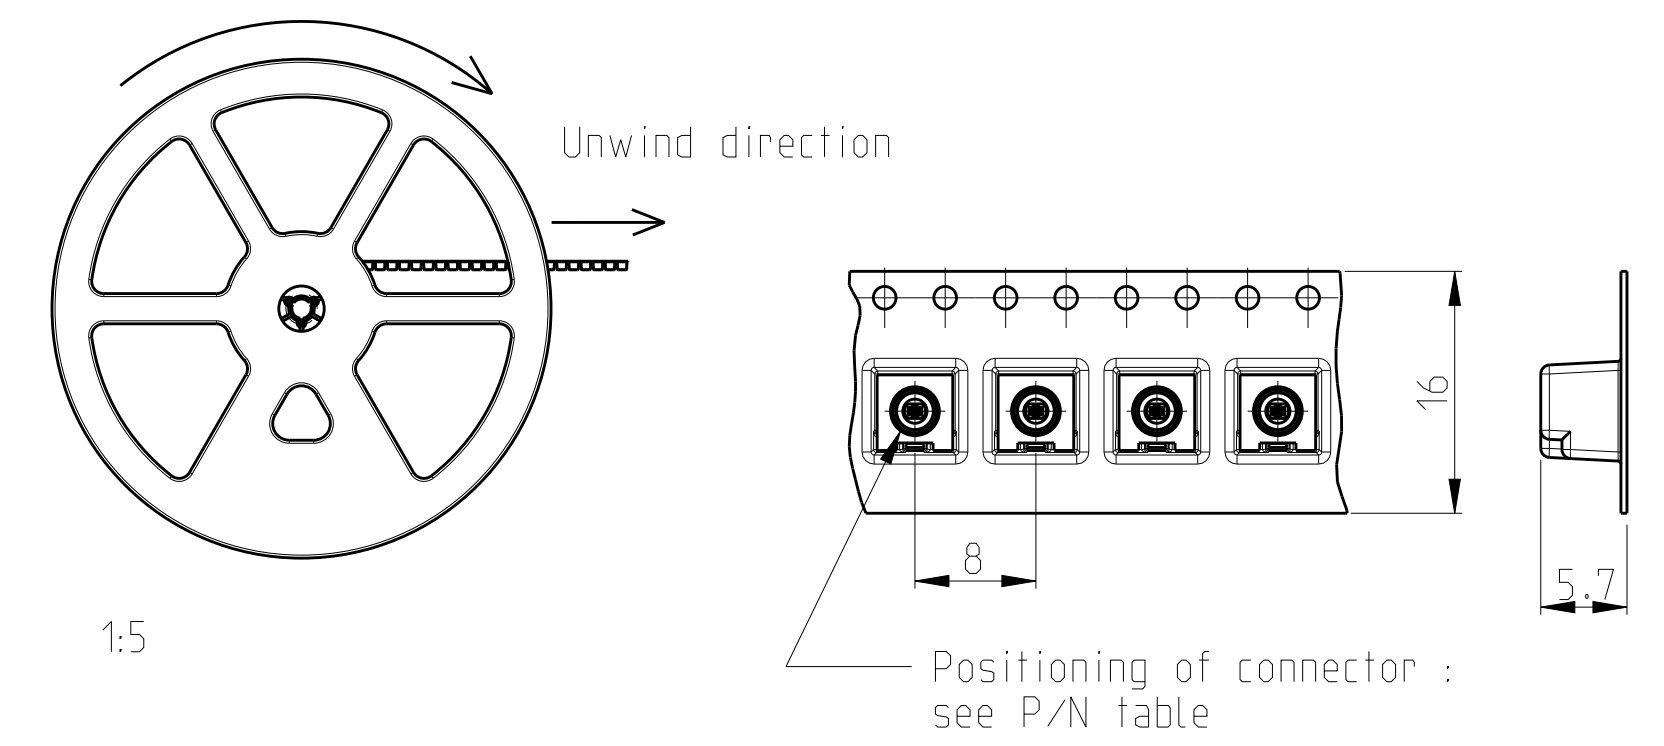


- ① Signal contact solder lead
- ② Partial Sn plating on ①
- 3) Interface dimensions in accordance with CECC22340
- 4) Comply with IEC 60286-3 and EIA-481
- ⑤ DIN ISO 8015; DIN ISO 2768-m-H

Solderpad layout

Micro strip

Soldering side

Coplanar

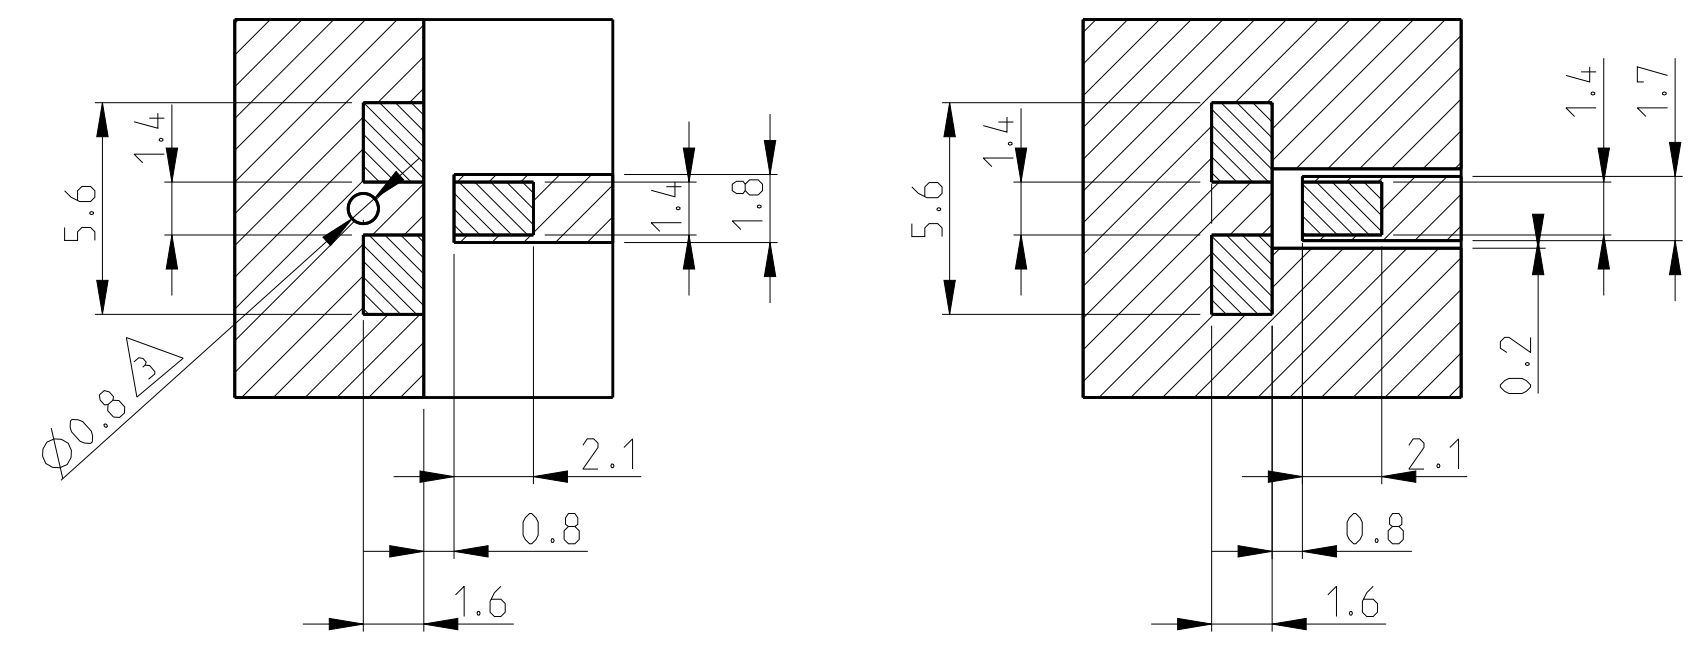


Bottom side : fully metallised

Bottom side : no requirements

Applicable for PCB :
1 mm thickness and FR4 material
All tolerances of solder pad layout : ±0.05

③ Plated through hole

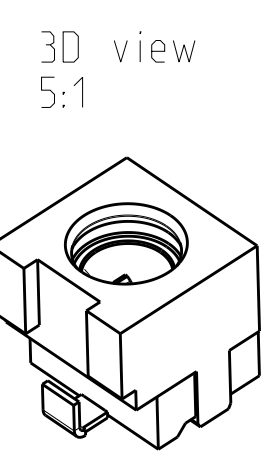

3D view
5:1

1:1

Tyco part number	Style	Positioning in tape
6-1460820-1 (ROHS Compliant) ②	Straight 	Straight
6-1460820-2 (ROHS Compliant) ②	Right angled 	Right angled

Active part numbers : contact TE CONNECTIVITY for other configuration availability

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AH	07OCT2005		TE Connectivity	
		CHK RL	12OCT2005			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SMD Jack, series MMCX		
0 PLC ±		⑤		PRODUCT SPEC		
1 PLC ±				APPLICATION SPEC		
2 PLC ±				SIZE		
3 PLC ±				CAGE CODE		
4 PLC ±				DRAWING NO		
ANGLES				RESTRICTED TO		
FINISH				A2 00779 C-1460820		
MATERIAL				SCALE 15:1 SHEET 1 OF 1 REV A2		
				CUSTOMER DRAWING		