




## MCL-15E-P

Ruland MCL-15e-P, 15/16" International Shaft Collar, Plastic, One-Piece Clamp Style, 45mm OD, 15mm Width

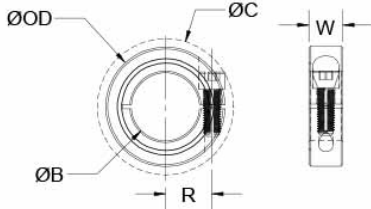

### Description


Ruland MCL-15E-P is a one-piece shaft collar with a 0.9375" bore, 45mm OD, and 15mm width. It is an international series shaft collar that has metric hardware and dimensions with inch bores. The clamp style design does not mar the shaft, is easy to remove, and is indefinitely adjustable. MCL-15E-P is commonly used for guiding, spacing, stopping, mounting, and component alignment. Equipment manufacturers benefit from the tightly controlled face to bore perpendicularity (TIR of ? .05mm). Perpendicularity is critical for alignment when the shaft collar is used as a load bearing face, mechanical stop, or for mounting components such as gears or bearings. Proprietary processes have been developed by Ruland to maintain superior fit, finish, and holding power. MCL-15E-P is stamped with the Ruland name and bore size for ease of identification. Forged screws test beyond DIN 912 12.9 standards to ensure maximum holding power. MCL-15E-P is manufactured from solid bar stock sourced from select North American mills and machined to a fine burr free finish. Ruland uses engineered acetal plastic for a consistent finish. MCL-15E-P is RoHS3 and REACH compliant and manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

### Product Specifications

|                                    |                                 |                                   |                         |
|------------------------------------|---------------------------------|-----------------------------------|-------------------------|
| <b>Bore (B)</b>                    | 0.9375 in                       | <b>Bore Tolerance</b>             | +0.0020 in / +0.0005 in |
| <b>Outer Diameter (OD)</b>         | 45 mm                           | <b>Clearance Diameter (C) MAX</b> | 52.1 mm                 |
| <b>Width (W)</b>                   | 15 mm                           | <b>Width Tolerance</b>            | +0.076 mm / -0.254 mm   |
| <b>Recommended Shaft Tolerance</b> | +0.0000 in / -0.0005 in         | <b>Forged Clamp Screw</b>         | M6                      |
| <b>Screw Material</b>              | 18-8 300 Series Stainless Steel | <b>Hex Wrench Size</b>            | 5.0 mm                  |
| <b>Screw Finish</b>                | Bright                          | <b>Seating Torque</b>             | 2.8 Nm                  |
| <b>Screw Location (R)</b>          | 17.50 mm                        | <b>Number of Screws</b>           | 1 ea                    |
| <b>Material Specification</b>      | Acetal Bar                      | <b>Finish Specification</b>       | Plain                   |
| <b>Manufacturer</b>                | Ruland Manufacturing            | <b>Country of Origin</b>          | USA                     |
| <b>Temperature</b>                 | -10°F to 185°F (-23°C to 85°C)  | <b>Weight (lbs)</b>               | 0.061900                |
| <b>UPC</b>                         | 634529113851                    | <b>Tariff Code</b>                | 8483.60.8000            |
| <b>UNSPC</b>                       | 31162811                        |                                   |                         |

**Note 1** Performance ratings are for guidance only. The user must determine suitability for a particular application.

**Note 2** No backslot

**Prop 65**  **WARNING** This product can expose you to chemicals including Nickel (metallic) and Formaldehyde, known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Installation Instructions

1. Use the MCL-15E-P international series shaft collar as it is received.
2. Wipe the bore clean.
3. Apply a thin coat of light oil to the shaft.
4. Place the collar onto the desired shaft location and tighten it using a 5.0 mm hex wrench until a slight resistance is felt.
5. Wring collar into its final position and tighten the screw to the full recommended seating torque of 2.8 Nm using a 5.0 mm torque wrench.