179228-4 - ACTIVE


AMP CT

TE Internal #: 179228-4 Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

AMP COMMON TERMINATION HOUSINGS

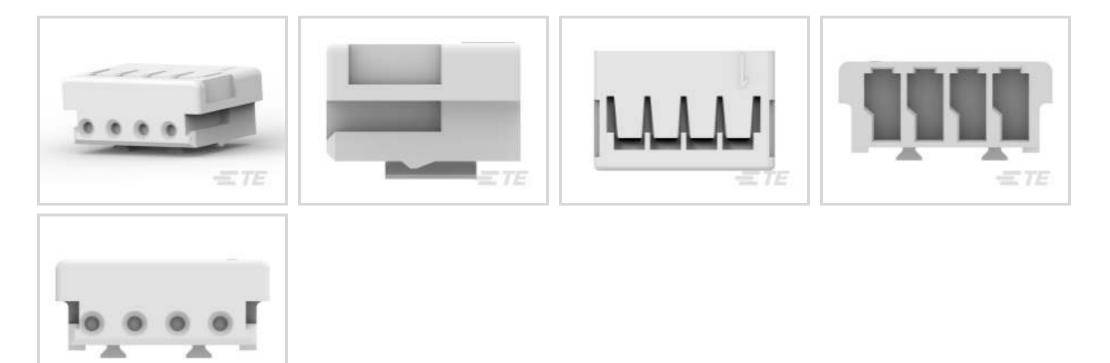

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board, Wire-to-Wire Number of Positions: 4 Centerline (Pitch): 2 mm [.079 in]

All AMP COMMON TERMINATION HOUSINGS (176)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	1
Electrical Characteristics	
Dielectric Withstanding Voltage (Max)	2000 VAC
Insulation Resistance	1000 MΩ
Operating Voltage	125 VAC

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT



Body Features	
Primary Product Color	Natural
Contact Features	
Contact Layout	Inline
Contact Type	Socket
Contact Current Rating (Max)	4 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Thermoplastic

Centerline (Pitch)

2 mm[.079 in]

Dimensions

Connector Length	10 mm[.393 in]
Connector Height	6.6 mm[.26 in]
Connector Width	4.6 mm[.181 in]
Wire Size	30 – 22 AWG
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard	CSA, UL
UL Flammability Rating	UL 94V-0
Packaging Features	

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT



Packaging Quantity	4000
Packaging Method	Bag & Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT







Also in the Series AMP CT



Customers Also Bought

Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT





Documents

Product Drawings CT CRIMP-2 REC HSG 4P NATURAL

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_179228-4_N1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179228-4_N1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179228-4_N1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

Product Specifications

Crimping of AMP 2.0mm Pitch, CT Crimp Typell Rec Contact

English

Application Specification

English

Housing, Receptacle, Wire-to-Wire / Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, AMP CT



Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English

Agency Approvals Agency Approval Document

English