LOOSE PIECE		TAPE MOUNTED		SPECIFICATIONS					
MATERIAL NUMBER	ENGINEERING NUMBER	MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	"S" ±.005 [0.13]	"W" ±.010 [0.25]	"C" MIN.	"L" MAX.	"H"
191440037	C-241-06X	191440038	C-241-06XT	6	.146 [3.71]	.375 [9.53]	.301 [7.65]	1.103 [28.02]	.980 [24.89]
191440039	C-241-08X	191440041	C-241-08XT	8	.173 [4.39]				
191440042	C-241-10X	191440043	C-241-10XT	10	.198 [5.03]				
---	---	---	---	10	.198 [5.03]	.533 [13.54]	.393 [9.98]	1.256 [31.90]	---
---	---	---	---	14	.265 [6.73]				
---	---	---	---	56	.328 [8.33]				

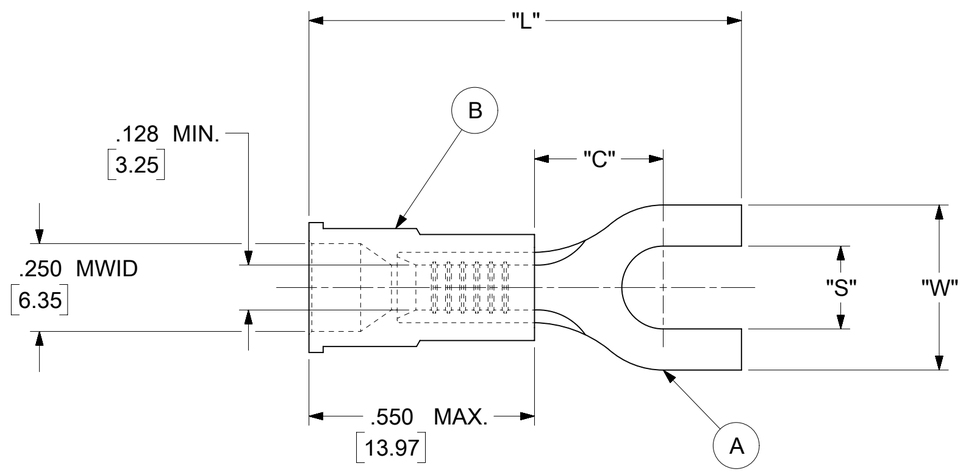

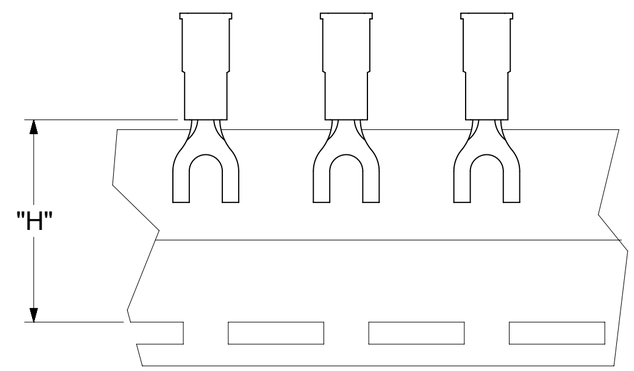

PARTS ON TAPE

NOTES:

1. MATERIAL:
   (A). TERMINAL: COPPER (STOCK THICKNESS .040±.001 [1.02]
   PLATING: ELECTRO-TIN (.0003 MIN.)
   (B). INSULATION: MOLDED PVC (YELLOW)
2. MWID: MAXIMUM WIRE INSULATION DIAMETER
3. WIRE SIZE: 12 - 10 AWG
   4.0 - 6.0 MM^2
4. "UL" LISTING #E32244
   "CSA" LISTING #18689
5. ALL DIMENSIONS IN INCHES/[MM].
6. PARTS ARE ROHS COMPLIANT.
7. DIMS. SHOWN ARE FOR REFERENCE ONLY.

DOCUMENT STATUS	P1	RELEASE DATE	2019/07/10 13:29:23

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SYMBOLS: = 0 (5A) = 0 (5C) = 0 (5D) = 0 (S) = 0 = 0 (C) = 0 = 0 = 0 = 0

DIMENSION UNITS	SCALE
INCH/MM	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

	MM	INCH
4 PLACES	±	±
3 PLACES	±	± 0.005
2 PLACES	± 0.13	± 0.01
1 PLACE	± 0.25	±
0 PLACES	±	±
ANGULAR TOL	± °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: MIGRATION TO ECTR/NX

EC NO: 620268
DRWN: ABENJAMINLW 2019/07/05
CHK'D: DMYRICK 2019/07/08
APPR: JMACNEIL 2019/07/10

INITIAL REVISION:
DRWN: JJ 1984/10/31
APPR: JMACNEIL 2019/07/10

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 19144

molex

SPADE TONGUE TERMINAL
INSULKRIMP 200-SERIES

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
191440037	PSD	000	A

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

FORMAT: Eng-tega-master-tb-prod-C
REVISION: D
DATE: 2018/01/18