


# SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
H1	ENGINEERING RELEASE	PB	4/15/94	J. BENZ
J	STANDARDIZE	KMM	6/24/94	R. RICE
K	ADD MISSING DIMS \ ADD BARBS TO CONTACT	KMM	2/7/96	R. RICE
L	CONTACT NOW BeCu / CHANGE KNURL	CZS	4/8/99	R. RICE

ALL DIMENSIONS ARE REFERENCE ONLY

000000

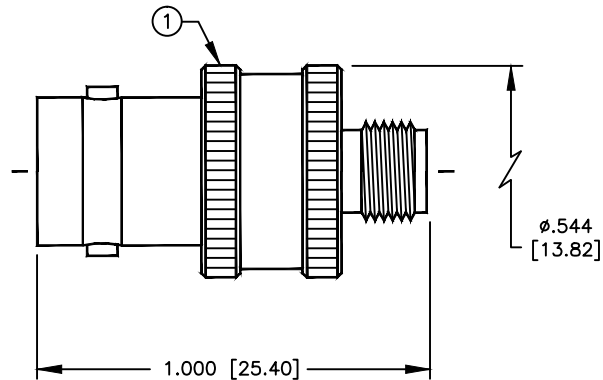

## SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
 WORKING VOLTAGE: 335 @ SEA LEVEL  
 FREQUENCY RANGE: 0-4 GHz  
 INTERFACE PER MIL-STD-348A, SECTION 301.2 & 310.2

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]  
 UNLESS OTHERWISE NOTED TOLERANCES ARE:  
 DECIMALS      DIAMETER

*RFconnectors*

DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (619)549-6340  
 (619)549-6345 FAX

## RFB-1142

BNC FEMALE TO SMA FEMALE ADAPTER

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
4	RETAINING RING	1	BRASS	NICKEL
3	DIELECTRIC	1	PTFE	NONE
2	CONTACT	1	BeCu	GOLD
1	BODY	1	BRASS	NICKEL

DRAWN C. ZUNIGA	4/8/99
CHECKED	
ORJ DRAWN D. FRIAS	3/15/88
APPROVALS	DATE

SIZE A	CABLE GROUP N/A	DWG NO. 8088	REV L
SCALE: 2:1		CAD FILE 13ARC B	SHEET 1 OF 1