


COIL: @ 25° C  
 RESISTANCE 160 OHMS ± 10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.0 VDC  
 MUST RELEASE .7 - 4.0 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS AT 30 g's  
 SHOCK 100 g's 6 ± 1 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

CUSTOMER DATA SHEET

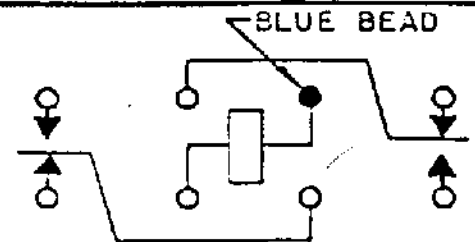

CONTACT RATING: LOW LEVEL TO  
2 A @ 28 VDC 10000 OPERATIONS

DRB-18-86 JMB CK.



CUST. QPL  
 CUST. NO. 39016/6-111 L

TYPE HFW RELAY

HFV 1130G01